

1.8" SINGLE DIGIT RED/YELLOW GREEN DISPLAY

A-18102DHG

Features

- 1.8 inch digit height
- Red / Yellow Green emitting color
- White segment color, black face
- Low current operation
- Easy mounting on PCB boards or sockets
- Lead free, RoHS compliant

Applications

- Digital clocks
- Electronic meters
- Other electronic devices for displaying numerical information

Ordering Information

Part Number	Emission Color	Face Color	Bin Code	Luminous Intensity IV (μcd) (IF=10mA)		
				Min.	Typ.	Max.
A-18102DHG	Red Yellow Green	Black	M	6145	7066	7987
			N	7988	9185	10383
			P	10384	11941	13499

Maximum Ratings

Parameter	Symbol	Value	Unit
Operating temperature	T_{OP}	-35 ~ 85	°C
Storage temperature	T_{STG}	-35 ~ 85	°C
Forward current ($T_A=25\text{ °C}$)	I_F	30	mA per seg
Peak forward current ($T_A=25\text{ °C}$) *1	I_{PF}	120	mA per seg
Reverse voltage ($T_A=25\text{ °C}$)	V_R	5	V per seg
Power consumption ($T_A=25\text{ °C}$)	P	80	mW per seg

*1 at 1/10 Duty Cycle






Electrical / Optical Characteristics (1) $(T_A = 25\text{ °C})$

Parameter	Symbol	Value	Unit	
Wavelength at peak emission IF = 20mA (Typ.)	$\lambda_{P(H)}$	640	nm	
Wavelength at peak emission IF = 20mA (Typ.)	$\lambda_{P(G)}$	570	nm	
Dominant wavelength IF = 20mA (Typ.)	λ_D	-	nm	
Spectral bandwidth at 50% IF = 20mA (Typ.)	$\Delta\lambda_{(H)}$	20	nm	
Spectral bandwidth at 50% IF = 20mA (Typ.)	$\Delta\lambda_{(G)}$	20	nm	
Viewing angle at 50% IF = 20mA (Typ.)	$2\theta_{1/2}$	-	degree	
Forward voltage IF = 20mA	(Min.)	$V_{F(H)}$	1.7	V
	(Min.)	$V_{F(G)}$	1.9	V
	(Typ.)	$V_{F(H)}$	1.85	V
	(Typ.)	$V_{F(G)}$	2.1	V
	(Max.)	$V_{F(H)}$	2.2	V
	(Max.)	$V_{F(G)}$	2.5	V
Reverse current VR = 5V (Max.)	I_R	20	μA	
Optical efficiency IF = 20mA (Typ.)	η_{DPT}	-	lm/W	






Luminous Intensity Bin Groups $(T_A = 25\text{ °C} \ \& \ I_F = 10\text{ mA})$

Bin Code	Luminous Intensity I_v (μcd)		
	Min.	Typ.	Max.
M	6145	7066	7987
N	7988	9185	10383
P	10384	11941	13499

Electrical/Optical Charateristic (2)

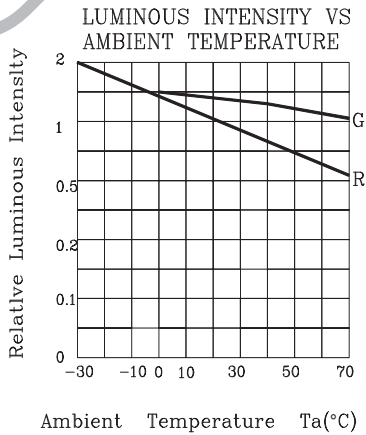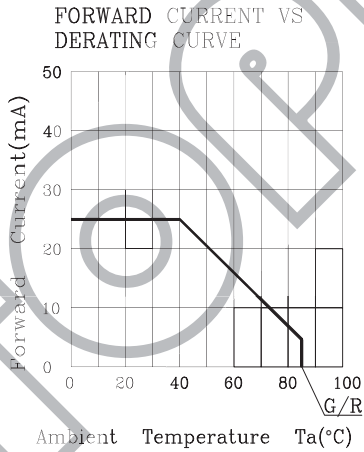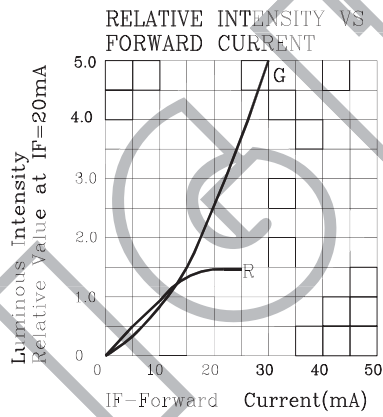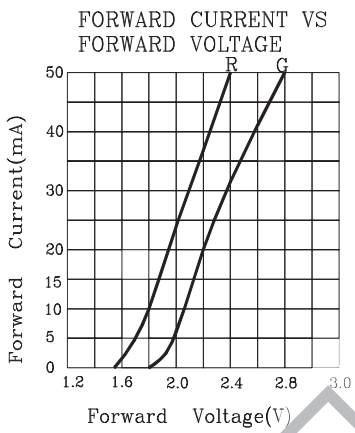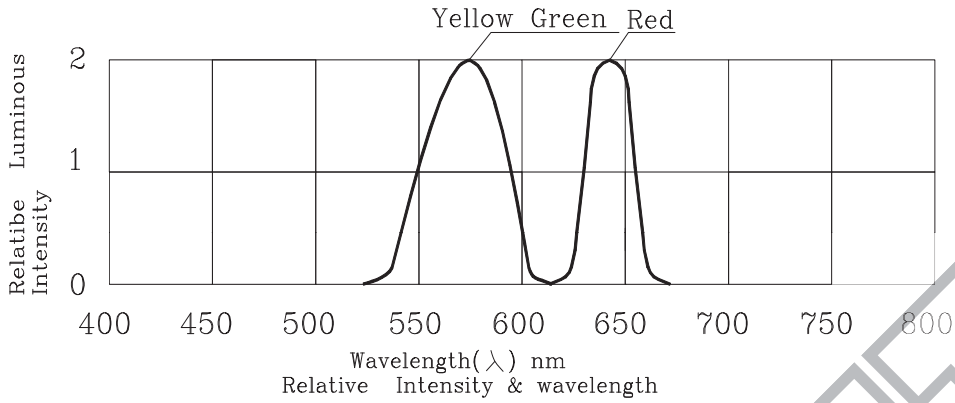

Package Outline Dimensions

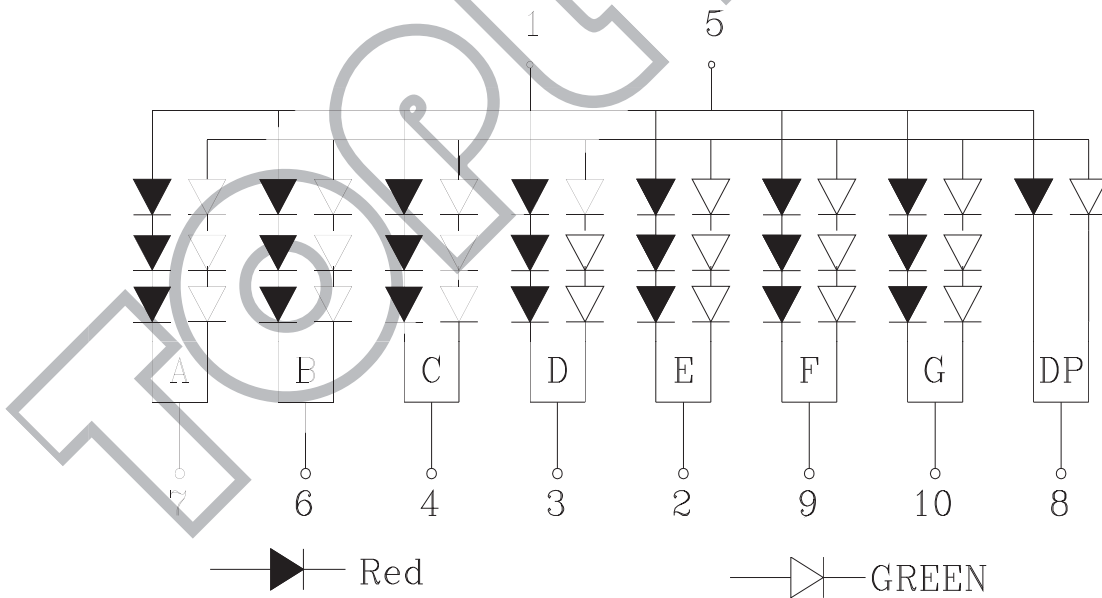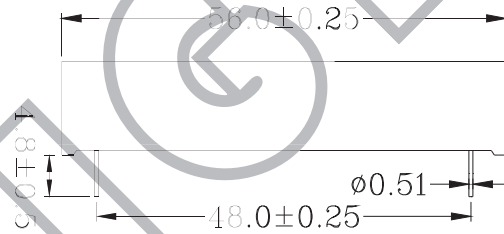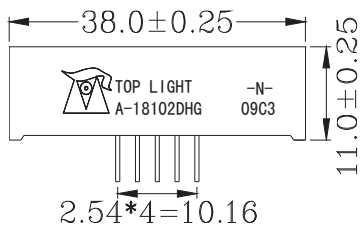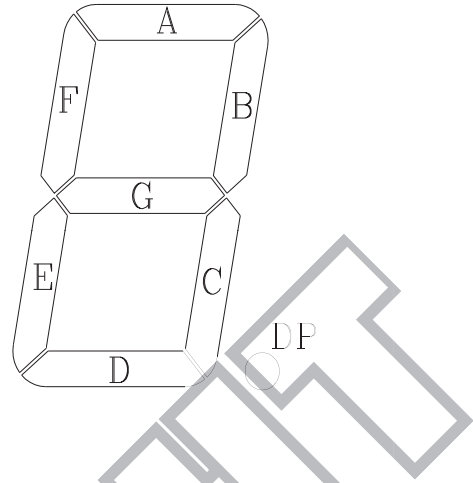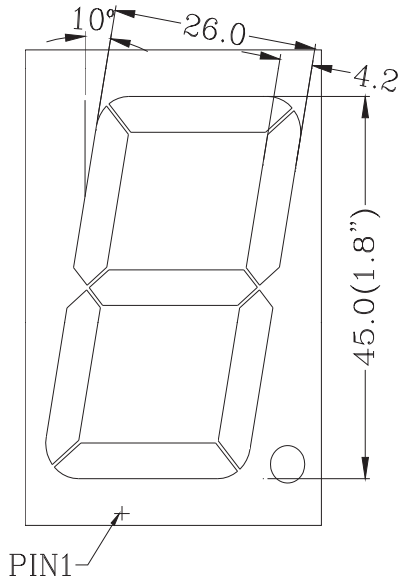

Notes:

1. All dimensions are in millimeters. Tolerance is +/-0.25 unless otherwise noted.
2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

Display Soldering Conditions

The recommended conditions for soldering are as follows. Because the component is made with epoxy resin, the units are susceptible to heat. Therefore, the preheating and soldering temperatures should be kept as low as possible to avoid damage.

1 . Manual Soldering Conditions(with 1.5mm Iron tip)

Iron Tip Temperature: 350°C Max, Time: 3s Max

Position: The iron should be situated at least 2mm away from the root of the leads.

2 . Through the Wave Soldering Conditions

Wave Soldering Profile For Lead-free Through-hole LED



3 . Soldering General Notes:

- Toplight recommend manual soldering to be used only for repair and rework purposes. The soldering iron should not exceed 30W in power. The tip of the soldering iron should not touch the reflector case to avoid heat-damage.
- Maintain the pre-heat and peak temperatures with dip units as low as possible and the times as short as is feasible, since the products are susceptible to heat during flow soldering.
- After soldering, allow at least three minutes for the component to cool to room temperature before further operations.
- If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Toplight for compatibility.