

# Φ3MM WHITE ROUND LED

## A-304BU11W51C

### Features

- Round type
- White emitting color
- Low current operation
- Lead free, RoHS compliant

### Applications

- Indicator
- TV set
- Auto
- Monitor

### Ordering Information

| Part Number   | Emission Color | Lens Color  | Bin Code | Luminous Intensity IV (mcd)<br>(IF=20mA) |       |       |
|---------------|----------------|-------------|----------|--|-------|-------|
|               |                |             |          | Min.                                     | Typ.  | Max.  |
| A-304BU11W51C | White          | Water Clear | N        | 7988                                     | 9186  | 10383 |
|               |                |             | P        | 10384                                    | 11942 | 13499 |
|               |                |             | R        | 13500                                    | 15525 | 17549 |

**Maximum Ratings**

| Parameter                                      | Symbol           | Value    | Unit       |
|--|------------------|----------|------------|
| Operating temperature                          | T <sub>OP</sub>  | -35 ~ 85 | ℃          |
| Storage temperature                            | T <sub>STG</sub> | -35 ~ 85 | ℃          |
| Forward current (T <sub>A</sub> =25 ℃)         | I <sub>F</sub>   | 30       | mA per seg |
| Peak forward current (T <sub>A</sub> =25 ℃) *1 | I <sub>PF</sub>  | 120      | mA per seg |
| Reverse voltage (T <sub>A</sub> =25 ℃)         | V <sub>R</sub>   | 5        | V per seg  |
| Power consumption (T <sub>A</sub> =25 ℃)       | P                | 80       | mW per seg |

\*1 at 1/10 Duty Cycle






**Electrical / Optical Characteristics (1)**(T<sub>A</sub> = 25 ℃)

| Parameter   | Symbol                   | Value | Unit   |
|---|--------------------------|-------|--------|
| <b>Color Temperature</b><br>I <sub>F</sub> = 20mA         | (Min.) T <sub>C</sub>    | 8000  | K      |
| <b>Color Temperature</b><br>I <sub>F</sub> = 20mA         | (Max.) T <sub>C</sub>    | 15000 | K      |
| <b>Color coordinates</b><br>I <sub>F</sub> = 20mA         | (Min.) X Axis            | 0.254 | -      |
| <b>Color coordinates</b><br>I <sub>F</sub> = 20mA         | (Max.) X Axis            | 0.302 | -      |
| <b>Color coordinates</b><br>I <sub>F</sub> = 20mA         | (Min.) Y Axis            | 0.248 | -      |
| <b>Color coordinates</b><br>I <sub>F</sub> = 20mA         | (Max.) Y Axis            | 0.318 | -      |
| <b>Spectral bandwidth at 50%</b><br>I <sub>F</sub> = 20mA | (Typ.) Δλ                | 30    | nm     |
| <b>Viewing angle at 50%</b><br>I <sub>F</sub> = 20mA      | (Typ.) 2θ <sub>1/2</sub> | 28    | degree |
| <b>Forward voltage</b><br>I <sub>F</sub> = 20mA           | (Min.) V <sub>F</sub>    | 2.8   | V      |
|   | (Typ.) V <sub>F</sub>    | 3.2   | V      |
|   | (Max.) V <sub>F</sub>    | 3.8   | V      |
| <b>Reverse current</b><br>V <sub>R</sub> = 5V             | (Max.) I <sub>R</sub>    | 10    | μA     |
| <b>Optical efficiency</b><br>I <sub>F</sub> = 20mA        | (Typ.) η <sub>OPT</sub>  | -     | lm/W   |


**Luminous Intensity Bin Groups**(T<sub>A</sub> = 25 ℃ & I<sub>F</sub> = 20 mA)

| Bin Code | Luminous Intensity I <sub>v</sub> (mcd) |       |       |
|----------|---|-------|-------|
|          | Min.                                    | Typ.  | Max.  |
| N        | 7988                                    | 9186  | 10383 |
| P        | 10384                                   | 11942 | 13499 |
| R        | 13500                                   | 15525 | 17549 |

Electrical/Optical Charateristic (2)

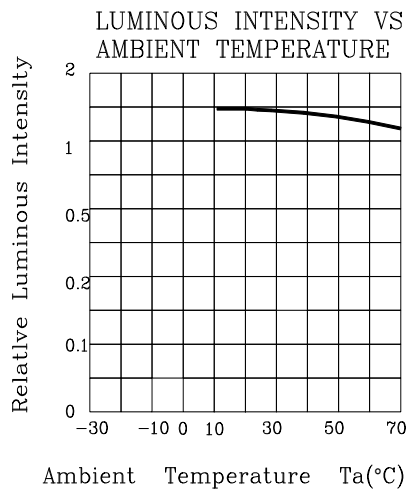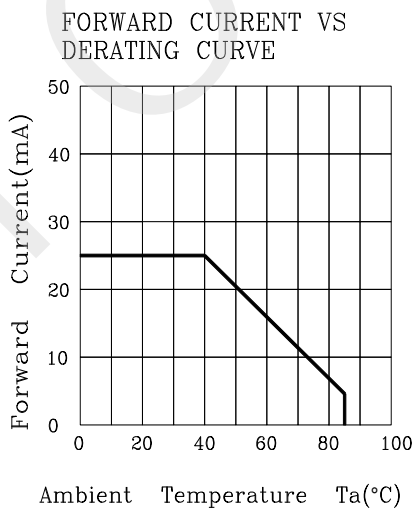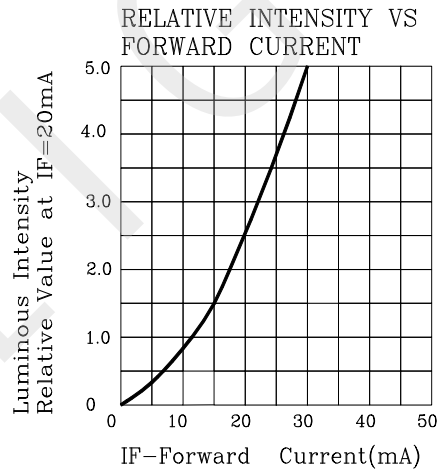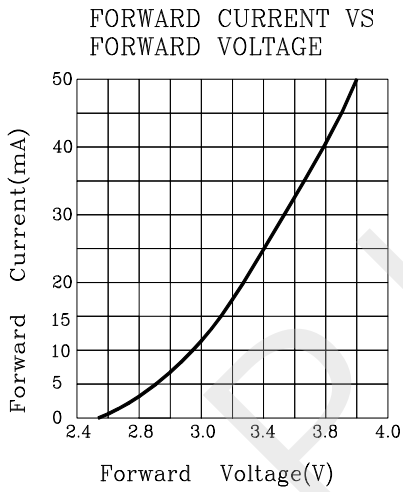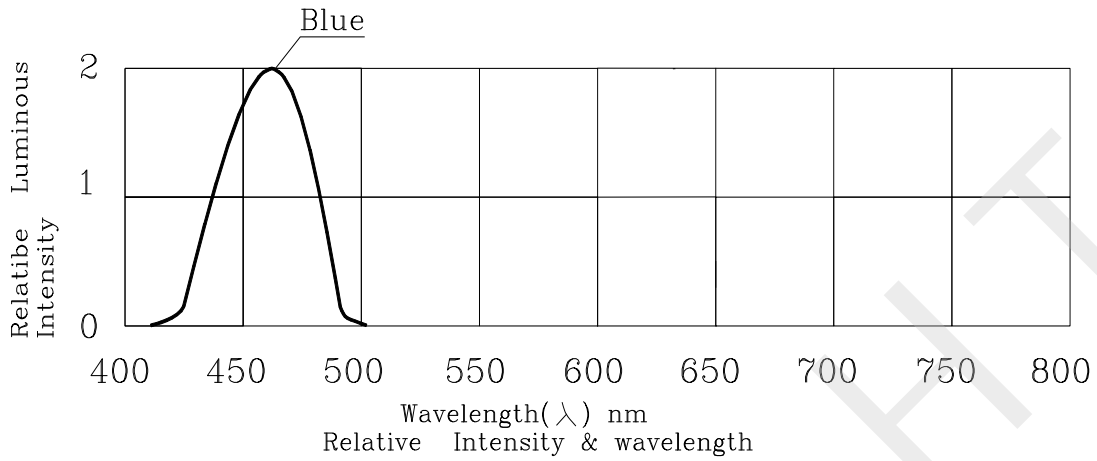

Package Outline Dimensions

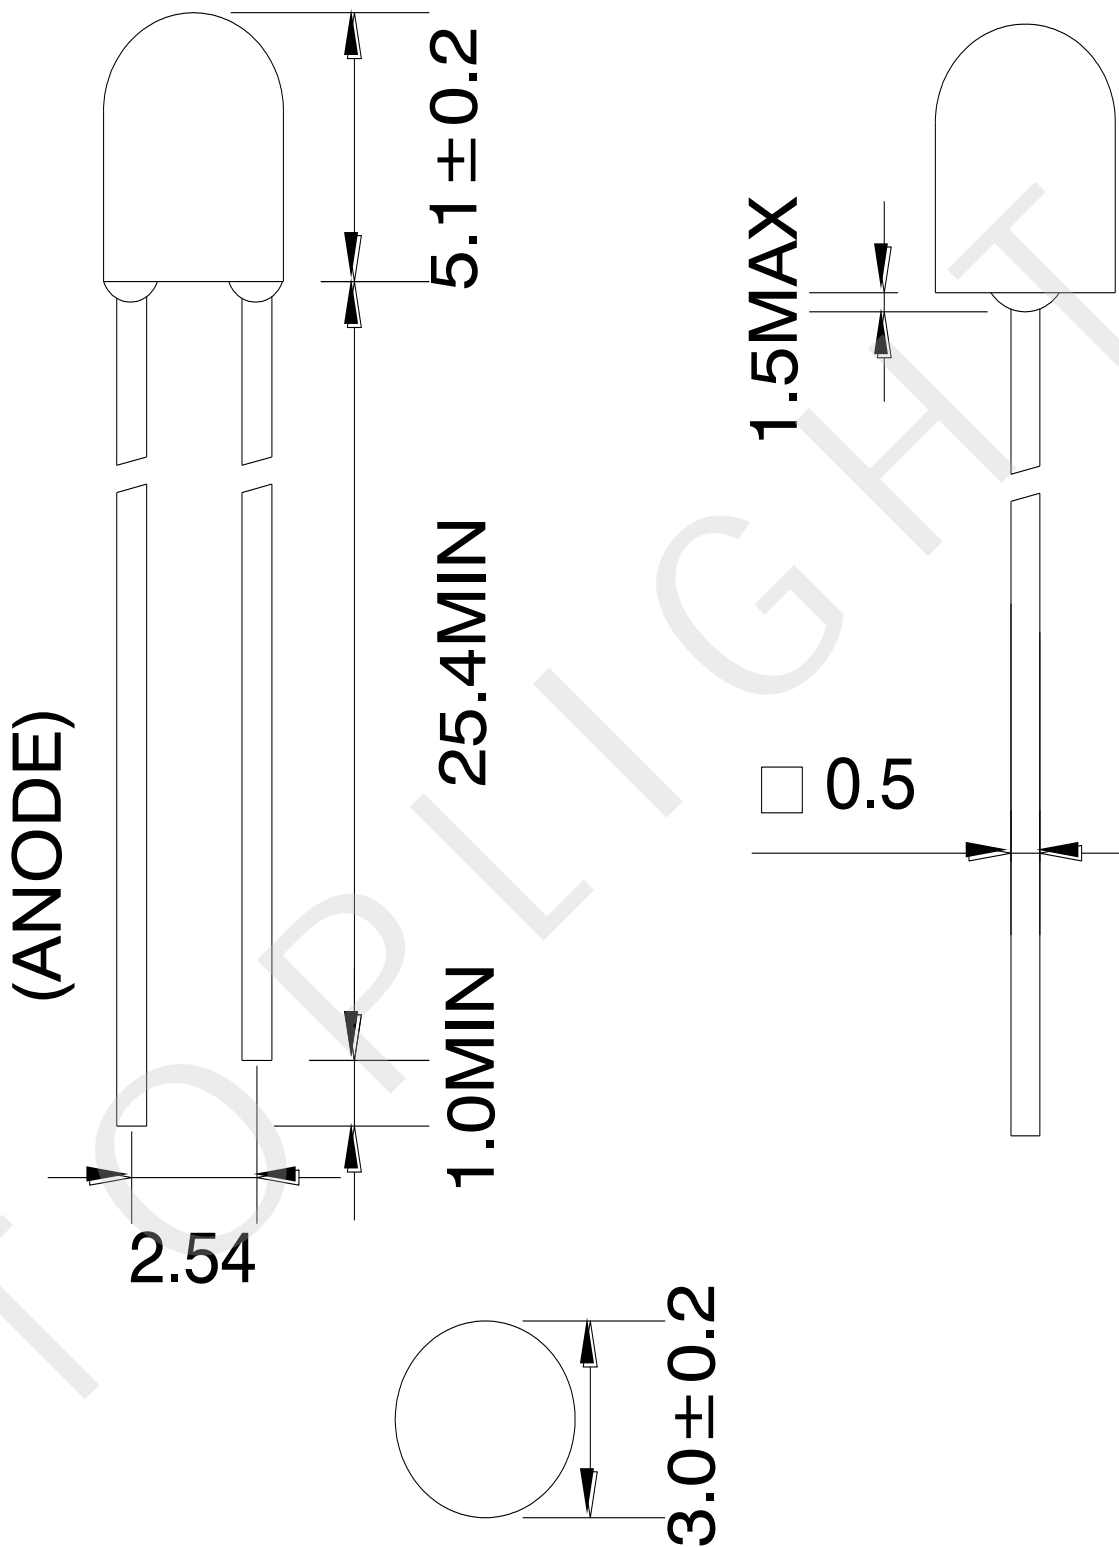

Notes:

1. All dimensions are in millimeters. Tolerance is +/-0.25 unless otherwise noted.
2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

## Display Soldering Conditions

The recommended conditions for soldering are as follows. Because the component is made with epoxy resin, the units are susceptible to heat. Therefore, the preheating and soldering temperatures should be kept as low as possible to avoid damage.


### 1 . Manual Soldering Conditions(with 1.5mm Iron tip )

Iron Tip Temperature: 350 °C Max, Time: 3s Max

Position: The iron should be situated at least 2mm away from the root of the leads.

### 2 . Through the Wave Soldering Conditions

Wave Soldering Profile For Lead-free Through-hole LED

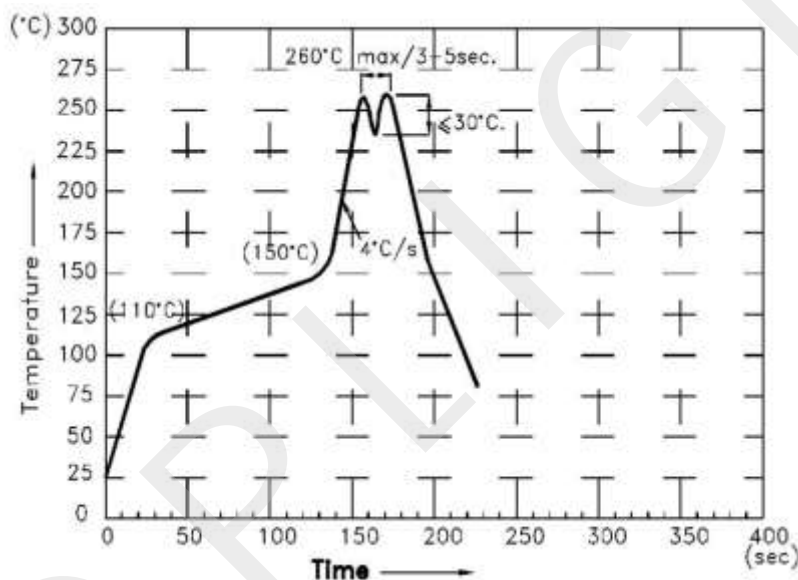

### 3 . Soldering General Notes:

- Toplight recommend manual soldering to be used only for repair and rework purposes. The soldering iron should not exceed 30W in power. The tip of the soldering iron should not touch the reflector case to avoid heat-damage.
- Maintain the pre-heat and peak temperatures with dip units as low as possible and the times as short as is feasible, since the products are susceptible to heat during flow soldering.
- After soldering, allow at least three minutes for the component to cool to room temperature before further operations.
- If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Toplight for compatibility.

Published by  
 Toplight International LLC  
 12 Key Largo, Aliso Viejo, CA 92656, USA  
 © All Rights Reserved