

SPECIFICATIONS

FOR TOPLIGHT COB MODULE

MODEL: ATL-FB72



TOPLIGHT INTERNATIONAL LLC.


www.toplightusa.com





TECHNICAL DATA SHEET

ATL-FB72 SERIES <FOR TOPLIGHT COB MODULE>

1. PRODUCT APPEARANCE

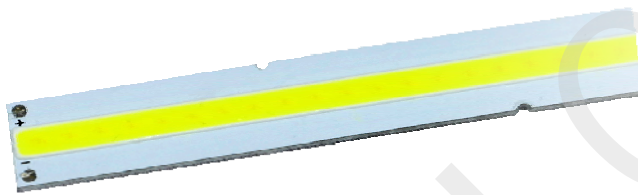

2. OUTLINE DRAWING

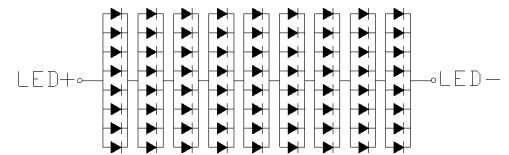

Unit: mm

Tolerance: ± 0.25

**TECHNICAL DATA SHEET****ATL-FB72 SERIES**

<FOR TOPLIGHT COB MODULE>

2 / 9

3. PERFORMANCE PARAMETERS**3-1. ABSOLUTE MAXIMUM RATINGS**

ITEM	SYMBOL	RATING	UNIT
Power Dissipation	P	7.2	W
Forward Current	I _F	240	mA
Reverse Voltage	V _R	45	V
Operating Temperature	T _{opr}	- 30 ~ + 85	°C
Storage Temperature	T _{stg}	- 40 ~ + 100	°C
Junction Temperature	T _{jmax}	+ 125	°C
Thermal Resistance	RJ-C	3.5	°C/W

Note:

*1. Forward Current allows maximum surge current ≤ 10 ms.

*2. Power dissipation and forward current are the values when the LED is used within the range of the derating curve in this data sheet.



TECHNICAL DATA SHEET

ATL-FB72 SERIES

<FOR TOPLIGHT COB MODULE>

3-2. ELECTRICAL-OPTICAL CHARACTERISTICS

(T_a=25°C)

**	PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
common	Forward Voltage *1	V _F	I _F =160mA	26.1	27.9	29.7	V	
	Beam Angle	—		—	120	—	Deg	
W	** Color Temp.	—	I _F =160mA	2870	3045	3220	K	
	** Color Rendering Index *3	Ra		80	—	—	—	
	W ₁	Luminous Flux *2		Φ	380	410	—	lm
		Luminous Efficiency		η	85	90	—	lm/W
	W ₂	Luminous Flux *2		Φ	411	440	—	lm
		Luminous Efficiency		η	91	97	—	lm/W
	W ₃	Luminous Flux *2		Φ	441	470	—	lm
		Luminous Efficiency		η	98	105	—	lm/W
D	** Color Temp.	—	I _F =160mA	4745	5028	5311	K	
	** Color Rendering Index *3	Ra		80	—	—	—	
	D ₁	Luminous Flux *2		Φ	400	430	—	lm
		Luminous Efficiency		η	89	95	—	lm/W
	D ₂	Luminous Flux *2		Φ	431	460	—	lm
		Luminous Efficiency		η	96	102	—	lm/W
	D ₃	Luminous Flux *2		Φ	461	490	—	lm
		Luminous Efficiency		η	103	109	—	lm/W
C	** Color Temp.	—	I _F =160mA	6020	6530	7040	K	
	** Color Rendering Index *3	Ra		80	—	—	—	
	C ₁	Luminous Flux *2		Φ	410	440	—	lm
		Luminous Efficiency		η	91	97	—	lm/W
	C ₂	Luminous Flux *2		Φ	441	470	—	lm
		Luminous Efficiency		η	98	105	—	lm/W
	C ₃	Luminous Flux *2		Φ	470	500	—	lm
		Luminous Efficiency		η	106	111	—	lm/W

(Note) Parameters is formulated based on shipping samples

*1. After 20 ms drive, Measurement tolerance: ± 3 %

*2. Monitored by Toplight's 1 m integrating sphere, after 20 ms drive, Measurement tolerance: ± 10 %

*3. Monitored by Toplight's 1 m integrating sphere, after 20 ms drive, Measurement tolerance:± 2




TECHNICAL DATA SHEET

ATL-FB72 SERIES


<FOR TOPLIGHT COB MODULE>

3-3. Characteristics diagram (TYP.)


Forward Current Vs. Relative Luminous Flux

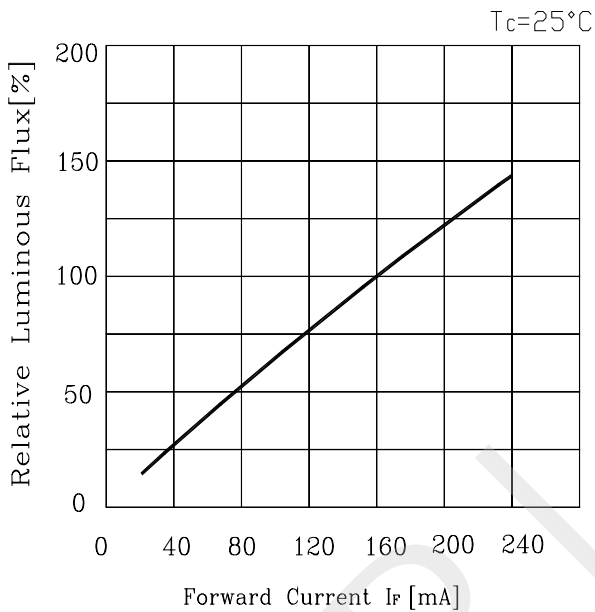


Forward Voltage Vs. Forward Current

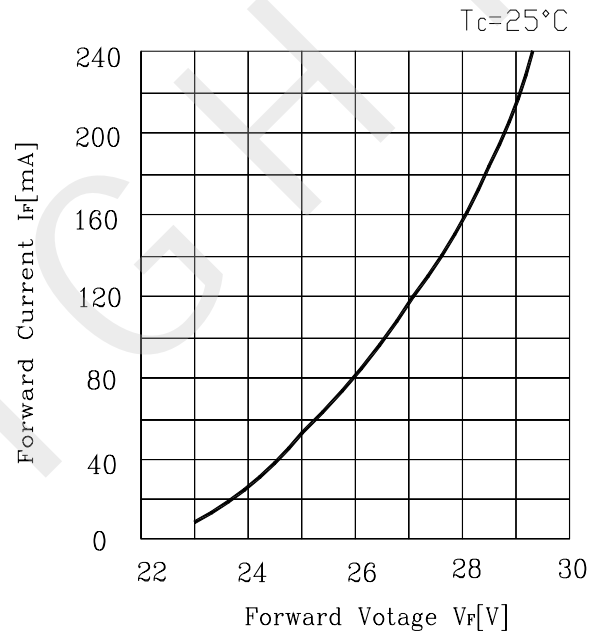

Case Temperature Vs. Relative Luminous Flux

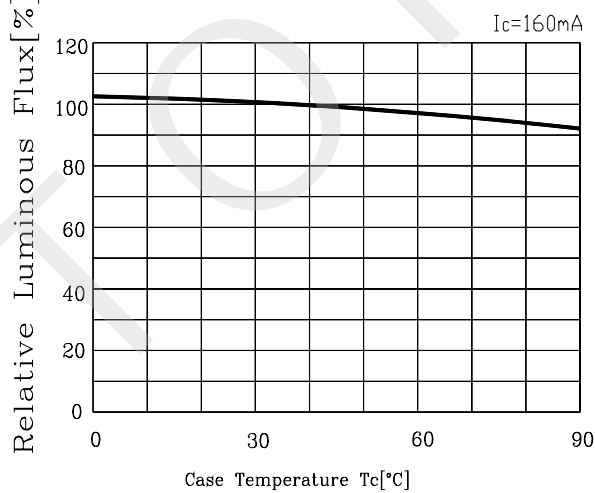

Case Temperature Vs. Forward Voltage

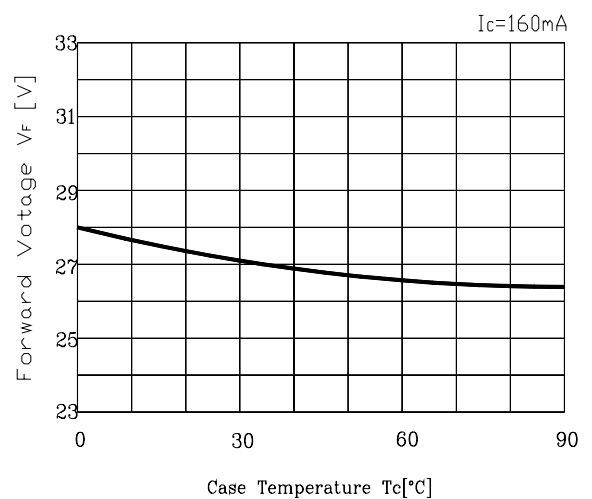

**TECHNICAL DATA SHEET****ATL-FB72 SERIES**

<FOR TOPLIGHT COB MODULE>

5 / 9

4. RELIABILITY

The reliability of products shall be satisfied with items listed below.

4-1. TEST ITEMS AND TEST CONDITIONS

NO.	TEST ITEM	TEST CONDITIONS	RESULT
1	Continuous operation test	$T_a = 25^\circ\text{C}$, $I_F = 160\text{ mA} \times 1000\text{ hours}$ (with Al fin)	PASS
		$T_a = 80^\circ\text{C}$, $T_j = 120^\circ\text{C}$, $I_F = 160\text{ mA} \times 1000\text{ hours}$ (with Al fin)	
2	Low temperature storage	$T_a = -40^\circ\text{C} \times 1000\text{ hours}$	PASS
3	High temperature storage	$T_a = 100^\circ\text{C} \times 1000\text{ hours}$	PASS
4	Moisture resistance	$T_a = 60^\circ\text{C}$, 90%RH for 1000 hours	PASS
5	Thermal shock	$T_a = -40^\circ\text{C} \times 30\text{ minutes} \sim 100^\circ\text{C} \times 30\text{ minutes}$, 100 cycle	PASS

4-2. FAILURE CRITERIA

NO.	PARAMETER	SYMBOL	FAILURE CRITERIA
1	Forward Voltage	V_F	$V_F > \text{Initial value} \times 1.1$
2	Luminous Flux	Φ	$\Phi < \text{Initial value} \times 0.7$



TECHNICAL DATA SHEET

ATL-FB72 SERIES

<FOR TOPLIGHT COB MODULE>

5. CHROMATICITY COORDINATES REGIONAL

5-1. 3000K CHROMATICITY COORDINATES


(Tolerance: $x,y \pm 0.005$)

($I_F = 160\text{mA}$, $T_c = 25^\circ\text{C}$)

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	NO.5
	x	0.4363	0.4305	0.4320	0.4340	0.4377
	y	0.4201	0.4206	0.4201	0.4188	0.4180

* The percentage of each rank in the shipment shall be determined by TOPLIGHT.

Chromaticity Diagram

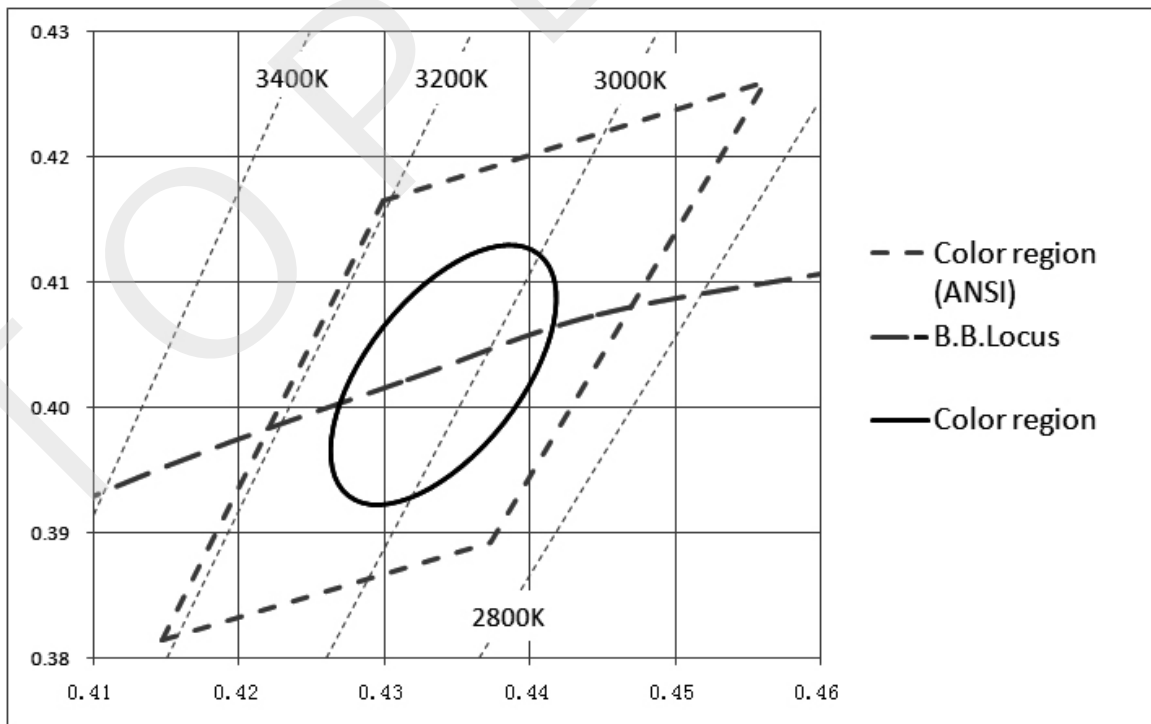

Note: The tolerance of measurement at our tester is $V_F \pm 3\%$, $D_v \pm 10\%$, Chromaticity(x,y) ± 0.005 .



TECHNICAL DATA SHEET

ATL-FB72 SERIES <FOR TOPLIGHT COB MODULE>

5-2. 5000K CHROMATICITY COORDINATES


(Tolerance: $x,y \pm 0.005$)

($I_F = 160\text{mA}, T_c = 25^\circ\text{C}$)

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	NO.5
	x	0.3551	0.3376	0.3366	0.3515	0.3551
	y	0.376	0.3616	0.3369	0.3487	0.376

* The percentage of each rank in the shipment shall be determined by TOPLIGHT.

Chromaticity Diagram

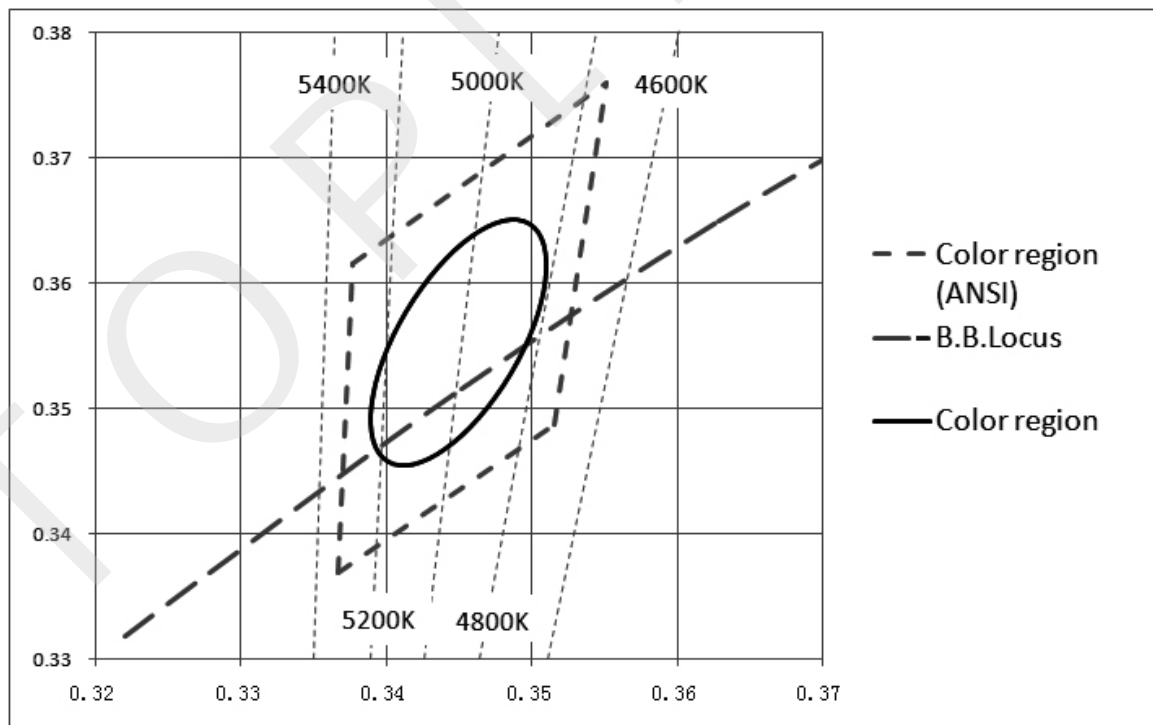

Note: The tolerance of measurement at our tester is $V_F \pm 3\%$, $D_v \pm 10\%$, Chromaticity(x,y) ± 0.005 .



TECHNICAL DATA SHEET

ATL-FB72 SERIES

<FOR TOPLIGHT COB MODULE>

5-3. 6500K CHROMATICITY COORDINATES


(Tolerance: $x,y \pm 0.005$)

($I_F = 160mA, T_c = 25^\circ C$)

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	NO.5
	x	0.3205	0.3028	0.3068	0.3221	0.3205
	y	0.3481	0.3304	0.3113	0.3261	0.3481

* The percentage of each rank in the shipment shall be determined by TOPLIGHT.

Chromaticity Diagram

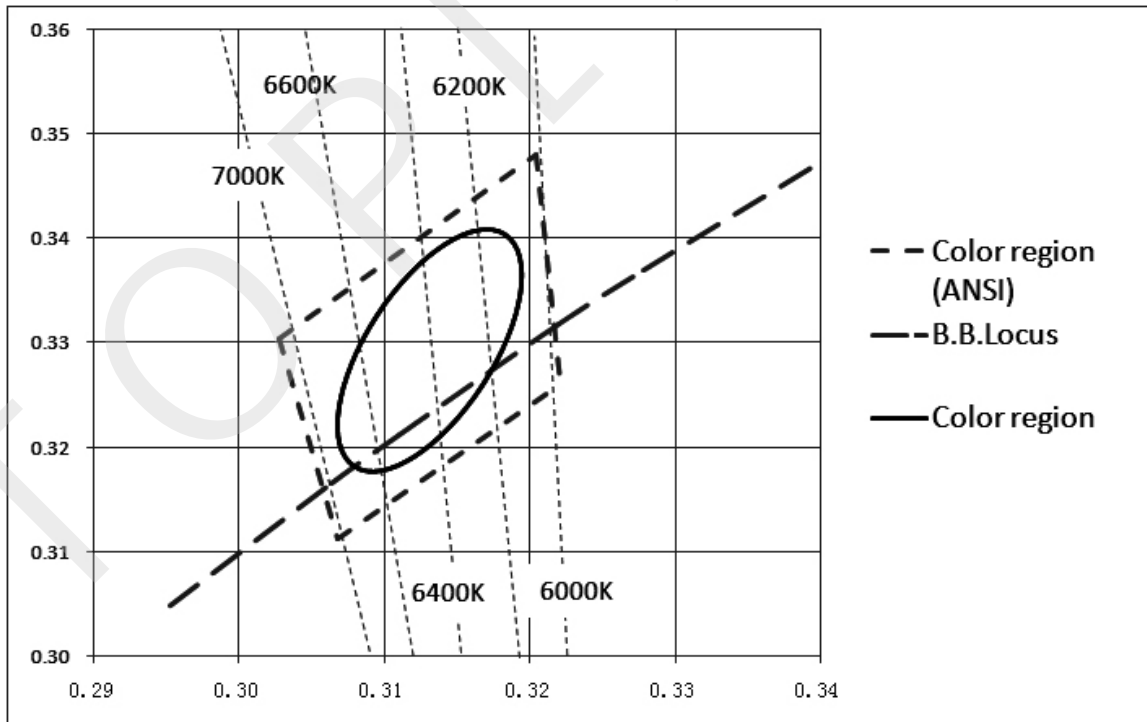

Note: The tolerance of measurement at our tester is $V_F \pm 3\%$, $D_v \pm 10\%$, Chromaticity(x,y) ± 0.005 .



TECHNICAL DATA SHEET

ATL-FB72 SERIES

<FOR TOPLIGHT COB MODULE>

9 / 9

6. PACKING

- ◆ One packaging tube installed a light bar
- ◆ One cardboard box interior 60, total of 60pieces
- ◆ Packaging Tube Size: 330mm × 14mm × 5.5mm
- ◆ Dimensions of outer carton: 400 × 190 × 95mm (Reference value)

60 pieces × 1 box = 60 pieces

1 piece × 60 = 60 pieces

1 piece × 1 tube = 1 piece

