

# Φ3MM / 8×8 / 1.1 INCH (28MM) RED / YELLOW GREEN DOT MATRIX

## A-1088DSRYG

### FEATURES

- ※ 1.1 inch (28.0mm) matrix height.
- ※ Low power requirement, solid state reliability.
- ※ Multicolor available, stackable horizontally.
- ※ Categorized for luminous intensity.
- ※ Easy mounting on P.C. boards.
- ※ Remain within RoHS compliant version.

### APPLICATION

- ※ Digital readout display
- ※ Instrument panels
- ※ Elevator
- ※ Audio equipment

### Ordering Information

Part Number	Emission Color	Face Color	Bin Code	Luminous Intensity IV (μcd) (IF=10mA)		
				Min.	Typ.	Max.
A-1088DSRYG	Super Red Yellow Green	Black	S	17550	21937	26325
			T	26326	32907	39489
			U	39490	49362	59235

## Maximum Ratings

Parameter	Symbol	Value	Unit
Operating temperature	$T_{OP}$	-35 ~ 85	°C
Storage temperature	$T_{STG}$	-35 ~ 85	°C
Forward current ( $T_A=25\text{ °C}$ )	$I_F$	30	mA per seg
Peak forward current ( $T_A=25\text{ °C}$ ) * <sup>1</sup>	$I_{PF}$	120	mA per seg
Reverse voltage ( $T_A=25\text{ °C}$ )	$V_R$	5	V per seg
Power consumption ( $T_A=25\text{ °C}$ )	P	80	mW per seg

\*1 at 1/10 Duty Cycle

## Electrical / Optical Characteristics (1)

( $T_A = 25\text{ °C}$ )






Parameter	Symbol	Value	Unit
Wavelength at peak emission YG(Typ.)	$\lambda_P$	570	nm
Wavelength at peak emission SR(Typ.)	$\lambda_P$	628	
Dominant wavelength IF = 20mA (Typ.)	$\lambda_D$	-	nm
Spectral bandwidth at 50% IF = 20mA YG(Typ.)	$\Delta\lambda$	20	nm
Spectral bandwidth at 50% IF = 20mA SR(Typ.)	$\Delta\lambda$	20	nm
Viewing angle at 50% IF = 20mA (Typ.)	$2\theta_{1/2}$	-	degree
Forward voltage IF = 20mA	YG(Min.)	$V_F$	1.9 V
	YG(Typ.)	$V_F$	2.1 V
	YG(Max.)	$V_F$	2.5 V
Forward voltage IF = 20mA	SR(Min.)	$V_F$	1.8 V
	SR(Typ.)	$V_F$	2.1 V
	SR(Max.)	$V_F$	2.4 V
Reverse current $V_R = 5V$ (Max.)	$I_R$	20	$\mu A$
Optical efficiency IF = 20mA (Typ.)	$\eta_{OPT}$	-	lm/W

## Luminous Intensity Bin Groups






( $T_A = 25\text{ °C}$  &  $I_F = 10\text{ mA}$ )

Bin Code	Luminous Intensity $I_v$ ( $\mu cd$ )		
	Min.	Typ.	Max.
S	17550	21937	26325
T	26326	32907	39489
U	39490	49362	59235

Electrical/Optical Charateristic (2)

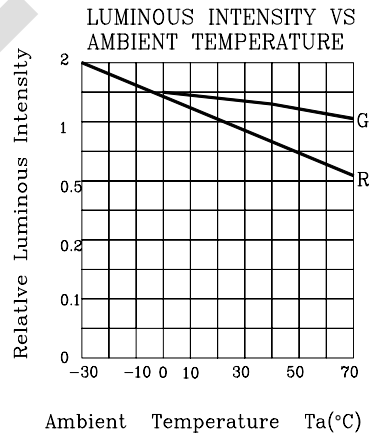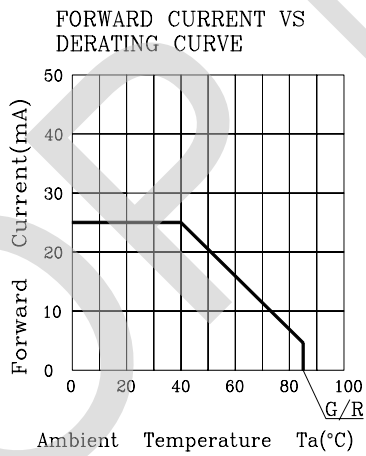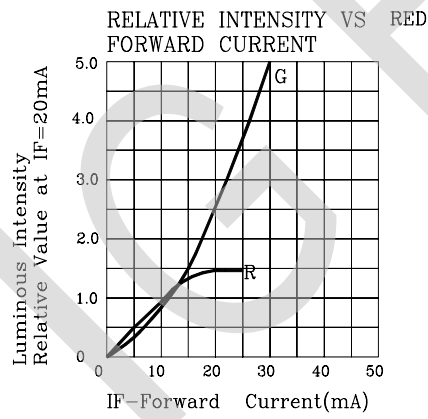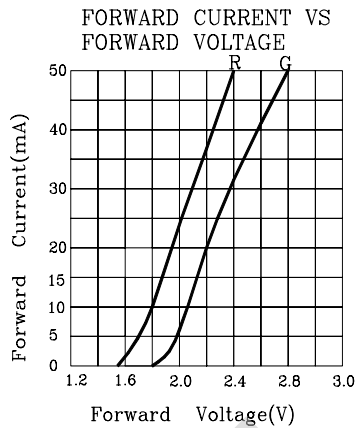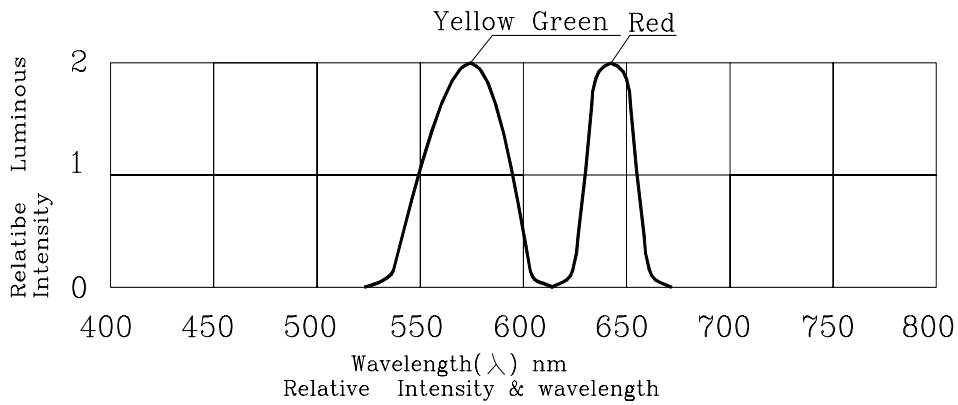

Package Outline Dimensions

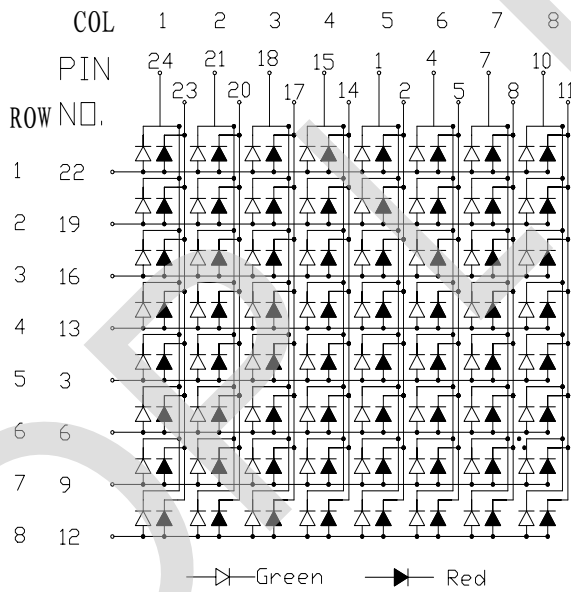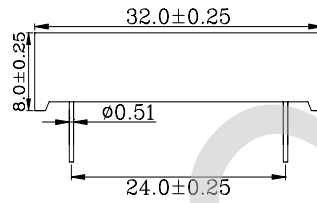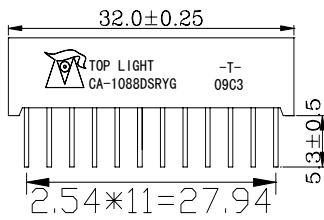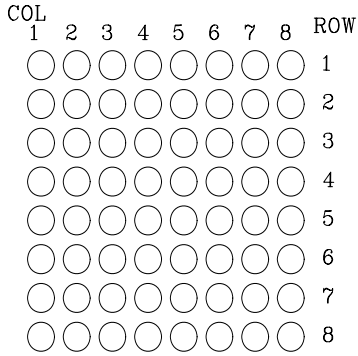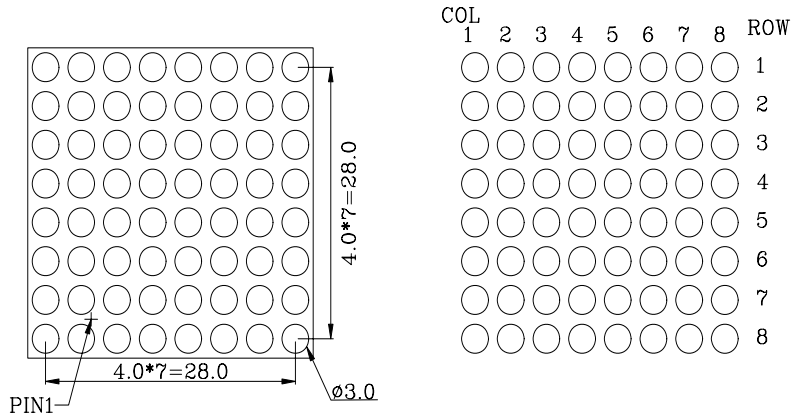

Notes:

1. All dimensions are in millimeters. Tolerance is  $\pm 0.25$  unless otherwise noted.
2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

## Display Soldering Conditions

The recommended conditions for soldering are as follows. Because the component is made with epoxy resin, the units are susceptible to heat. Therefore, the preheating and soldering temperatures should be kept as low as possible to avoid damage.


### 1 . Manual Soldering Conditions(with 1.5mm Iron tip )

Iron Tip Temperature: 350°C Max, Time: 3s Max

Position: The iron should be situated at least 2mm away from the root of the leads.

### 2 . Through the Wave Soldering Conditions

Wave Soldering Profile For Lead-free Through-hole LED

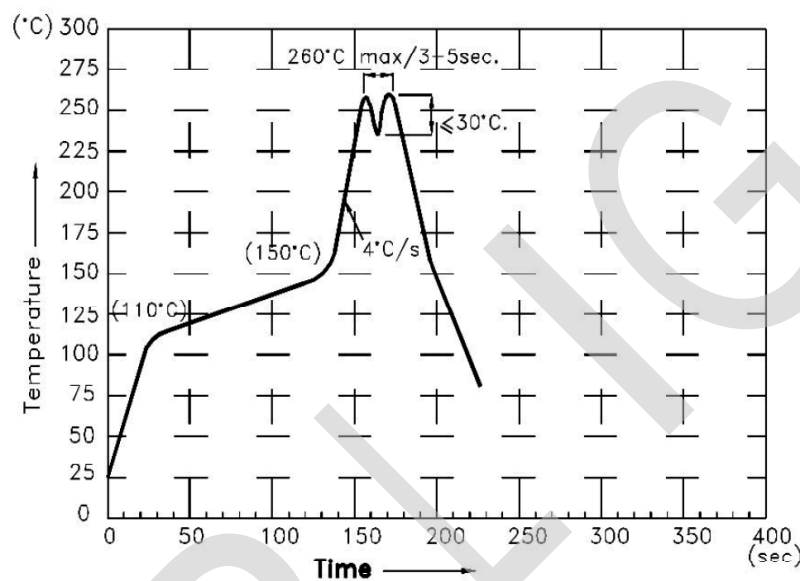

### 3 . Soldering General Notes:

- Toplight recommend manual soldering to be used only for repair and rework purposes. The soldering iron should not exceed 30W in power. The tip of the soldering iron should not touch the reflector case to avoid heat-damage.
- Maintain the pre-heat and peak temperatures with dip units as low as possible and the times as short as is feasible, since the products are susceptible to heat during flow soldering.
- After soldering, allow at least three minutes for the component to cool to room temperature before further operations.
- If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Toplight for compatibility.