

# ***SPECIFICATIONS***

FOR TOPLIGHT COB MODULE

**MODEL: ATL-Z72**



**TOPLIGHT INTERNATIONAL LLC.**


*[www.toplightusa.com](http://www.toplightusa.com)*




## TECHNICAL DATA SHEET

### ATL-Z72 SERIES <FOR TOPLIGHT COB MODULE>

#### 1. PRODUCT APPEARANCE

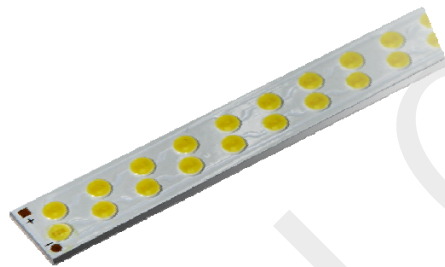

#### 2. OUTLINE DRAWING

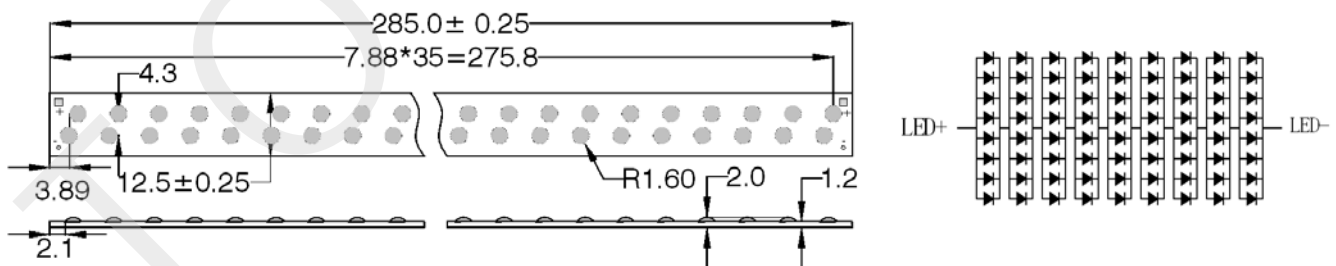

Unit: mm

Tolerance:  $\pm 0.25$

**TECHNICAL DATA SHEET****ATL-Z72 SERIES** <FOR TOPLIGHT COB MODULE>**3. PERFORMANCE PARAMETERS****3-1. ABSOLUTE MAXIMUM RATINGS**

ITEM	SYMBOL	RATING	UNIT
Power Dissipation	P	7.2	W
Forward Current	I <sub>F</sub>	240	mA
Reverse Voltage	V <sub>R</sub>	45	V
Operating Temperature	T <sub>opr</sub>	- 30 ~ + 85	°C
Storage Temperature	T <sub>stg</sub>	- 40 ~ + 100	°C
Junction Temperature	T <sub>jmax</sub>	+ 125	°C
Thermal Resistance	RJ-C	3.5	°C/W

**Note:**

\*1. Forward Current allows maximum surge current  $\leq 10$ ms.

\*2. Power dissipation and forward current are the values when the LED is used within the range of the derating curve in this data sheet.



**TECHNICAL DATA SHEET**

**ATL-Z72 SERIES** <FOR TOPLIGHT COB MODULE>

**3-2. ELECTRICAL-OPTICAL CHARACTERISTICS**

(T<sub>a</sub>=25°C)

**	PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
common	Forward Voltage *1	V <sub>F</sub>	I <sub>F</sub> =160mA	26.1	27.9	29.7	V	
	Beam Angle	—		—	120	—	Deg	
W	** Color Temp.	—	I <sub>F</sub> =160mA	2870	3045	3220	K	
	** Color Rendering Index *3	Ra		80	—	—	—	
	W <sub>1</sub>	Luminous Flux *2		Φ	380	410	—	lm
		Luminous Efficiency		η	85	90	—	lm/W
	W <sub>2</sub>	Luminous Flux *2		Φ	411	440	—	lm
		Luminous Efficiency		η	91	97	—	lm/W
	W <sub>3</sub>	Luminous Flux *2		Φ	441	470	—	lm
		Luminous Efficiency		η	98	105	—	lm/W
D	** Color Temp.	—	I <sub>F</sub> =160mA	4745	5028	5311	K	
	** Color Rendering Index *3	Ra		80	—	—	—	
	D <sub>1</sub>	Luminous Flux *2		Φ	400	430	—	lm
		Luminous Efficiency		η	89	95	—	lm/W
	D <sub>2</sub>	Luminous Flux *2		Φ	431	460	—	lm
		Luminous Efficiency		η	96	102	—	lm/W
	D <sub>3</sub>	Luminous Flux *2		Φ	461	490	—	lm
		Luminous Efficiency		η	103	109	—	lm/W
C	** Color Temp.	—	I <sub>F</sub> =160mA	6020	6530	7040	K	
	** Color Rendering Index *3	Ra		80	—	—	—	
	C <sub>1</sub>	Luminous Flux *2		Φ	410	440	—	lm
		Luminous Efficiency		η	91	97	—	lm/W
	C <sub>2</sub>	Luminous Flux *2		Φ	441	470	—	lm
		Luminous Efficiency		η	98	105	—	lm/W
	C <sub>3</sub>	Luminous Flux *2		Φ	470	500	—	lm
		Luminous Efficiency		η	106	111	—	lm/W

(Note) Parameters is formulated based on shipping samples

\*1. After 20 ms drive, Measurement tolerance: ± 3 %

\*2. Monitored by Toplight's 1 m integrating sphere, after 20 ms drive, Measurement tolerance: ± 10 %

\*3. Monitored by Toplight's 1 m integrating sphere, after 20 ms drive, Measurement tolerance:± 2




# TECHNICAL DATA SHEET


## ATL-Z72 SERIES <FOR TOPLIGHT COB MODULE>

### 3-3. Characteristics diagram (TYP.)


Forward Current Vs. Relative Luminous Flux

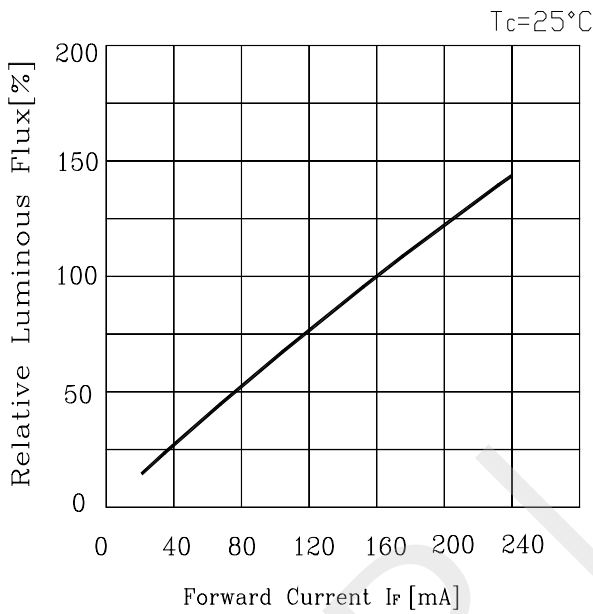


Forward Voltage Vs. Forward Current

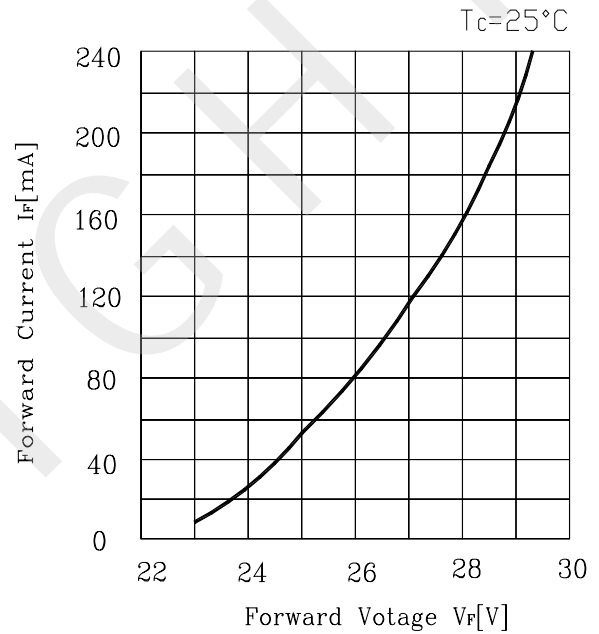

Case Temperature Vs. Relative Luminous Flux

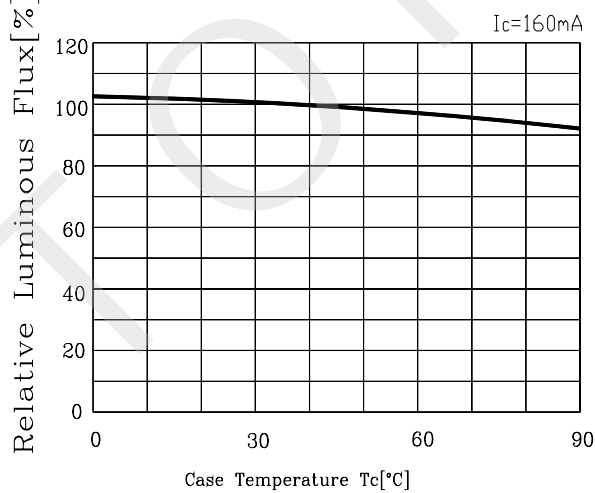

Case Temperature Vs. Forward Voltage

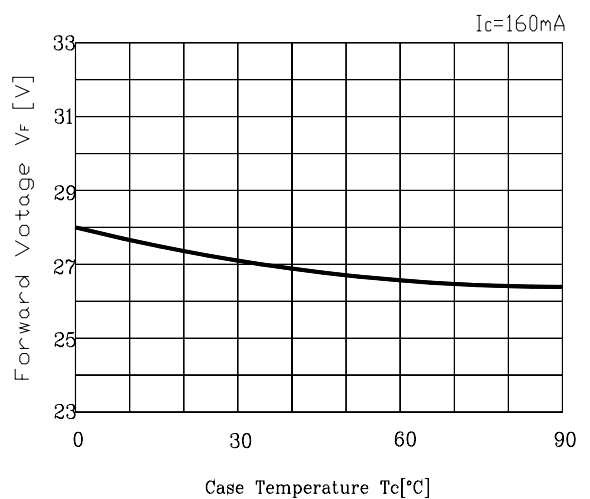

**TECHNICAL DATA SHEET****ATL-Z72 SERIES** <FOR TOPLIGHT COB MODULE>**4. RELIABILITY**

The reliability of products shall be satisfied with items listed below.

**4-1. TEST ITEMS AND TEST CONDITIONS**

NO.	TEST ITEM	TEST CONDITIONS	RESULT
1	Temperature Cycle	- 30°C(30 min) ~ + 85°C(30 min), 100 cycles	PASS
2	Temperature Humidity Storage	$T_{stg} = + 85^{\circ}\text{C}$ , RH = 80 %, Time = 1000 h	PASS
3	High Temperature Storage	$T_{stg} = + 85^{\circ}\text{C}$ , Time = 1000 h	PASS
4	Low Temperature Storage	$T_{stg} = - 40^{\circ}\text{C}$ , Time = 1000 h	PASS
5	Steady State Operating Life	$T_c = 85^{\circ}\text{C}$ , $I_F = 160 \text{ mA}$ , Time = 1000 h	PASS

**4-2. FAILURE CRITERIA**

NO.	PARAMETER	SYMBOL	FAILURE CRITERIA
1	Forward Voltage	$V_F$	$V_F > \text{Initial value} \times 1.1$
2	Luminous Flux	$\Phi$	$\Phi < \text{Initial value} \times 0.7$



**TECHNICAL DATA SHEET**

**ATL-Z72 SERIES** <FOR TOPLIGHT COB MODULE>

**5. CHROMATICITY COORDINATES REGIONAL**

**5-1. 3000K CHROMATICITY COORDINATES**


(Tolerance:  $x,y \pm 0.005$ )

( $I_F = 160\text{mA}$ ,  $T_c = 25^\circ\text{C}$ )

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	NO.5
	x	0.4363	0.4305	0.4320	0.4340	0.4377
	y	0.4201	0.4206	0.4201	0.4188	0.4180

\* The percentage of each rank in the shipment shall be determined by TOPLIGHT.

Chromaticity Diagram

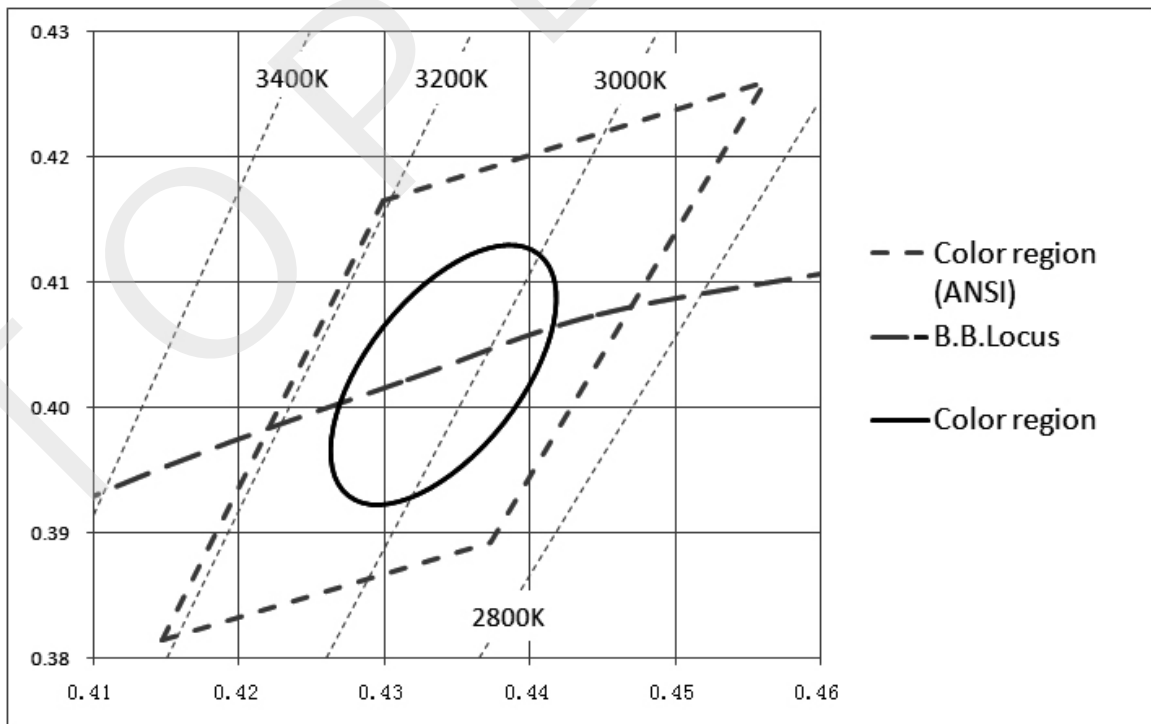

Note: The tolerance of measurement at our tester is  $V_F \pm 3\%$ ,  $D_v \pm 10\%$ , Chromaticity( $x,y$ ) $\pm 0.005$ .



**TECHNICAL DATA SHEET**

**ATL-Z72 SERIES** <FOR TOPLIGHT COB MODULE>

**5-2. 5000K CHROMATICITY COORDINATES**


(Tolerance:  $x,y \pm 0.005$ )

( $I_F = 160mA, T_c = 25^\circ C$ )

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	NO.5
	<b>x</b>	0.3551	0.3376	0.3366	0.3515	0.3551
	<b>y</b>	0.376	0.3616	0.3369	0.3487	0.376

\* The percentage of each rank in the shipment shall be determined by TOPLIGHT.

**Chromaticity Diagram**

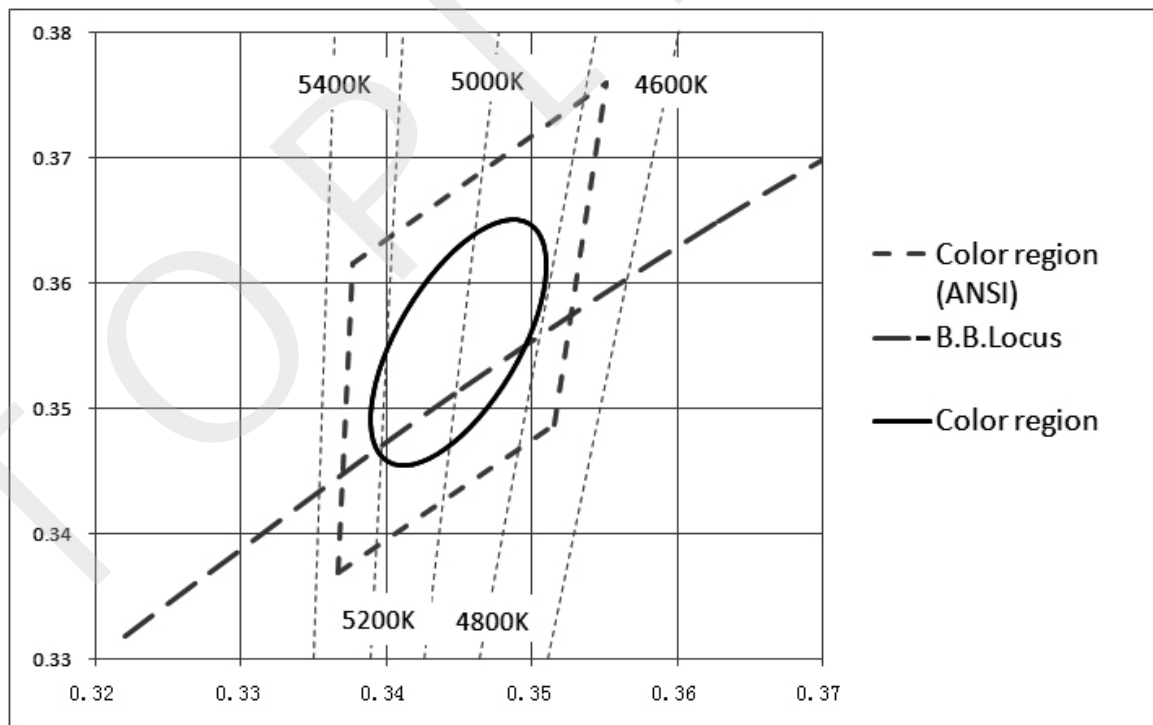

**Note:** The tolerance of measurement at our tester is  $V_F \pm 3\%$ ,  $D_v \pm 10\%$ , Chromaticity( $x,y$ ) $\pm 0.005$ .





**TECHNICAL DATA SHEET**

**ATL-Z72 SERIES** <FOR TOPLIGHT COB MODULE>

**5-3. 6500K CHROMATICITY COORDINATES**


(Tolerance:  $x,y \pm 0.005$ )

( $I_F = 160mA, T_c = 25^\circ C$ )

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	NO.5
	x	0.3205	0.3028	0.3068	0.3221	0.3205
	y	0.3481	0.3304	0.3113	0.3261	0.3481

\* The percentage of each rank in the shipment shall be determined by TOPLIGHT.

**Chromaticity Diagram**

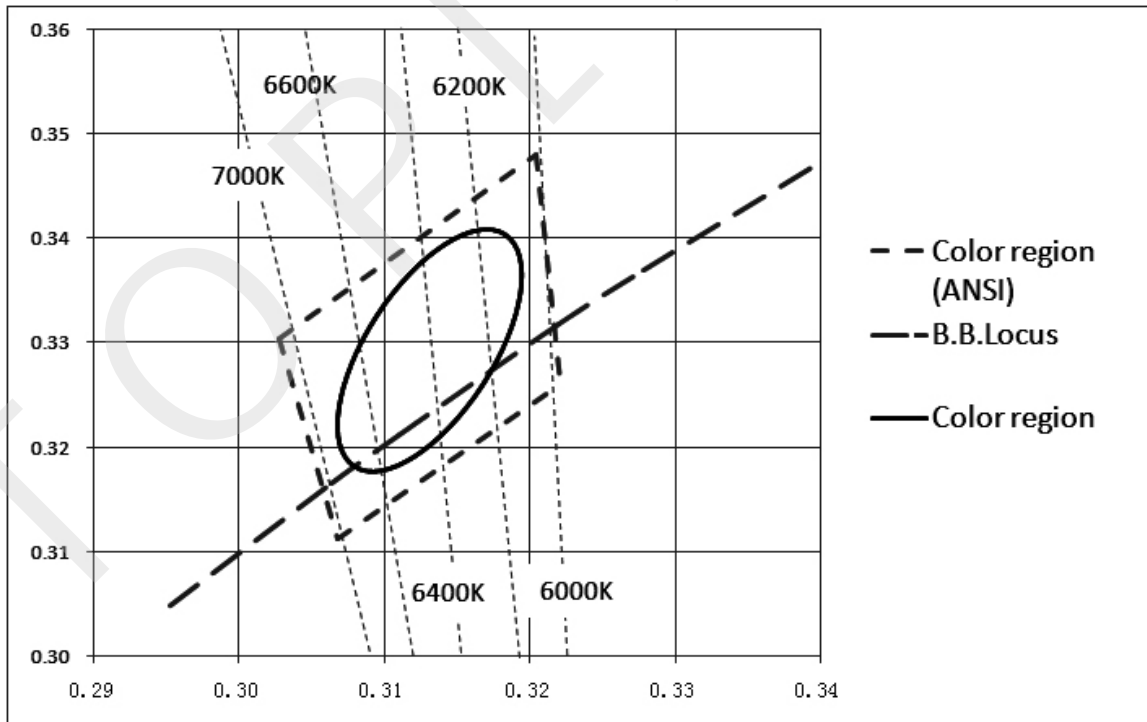

**Note: The tolerance of measurement at our tester is  $V_F \pm 3\%$  ,  $D_v \pm 10\%$  , Chromaticity( $x,y$ ) $\pm 0.005$ .**



## TECHNICAL DATA SHEET

### ATL-Z72 SERIES <FOR TOPLIGHT COB MODULE>

#### 6. PACKING

- ◆ One packaging tube installed a light bar
- ◆ One cardboard box interior 60, total of 60pieces
- ◆ Packaging Tube Size: 330mm × 14mm × 5.5mm
- ◆ Dimensions of outer carton: 400 × 190 × 95mm (Reference value)

60 pieces × 1 box = 60 pieces

1 piece × 60 = 60 pieces

1 piece × 1 tube = 1 piece

